

# Technical data sheet RUNFLOOR 58 - F04

## 1. DESCRIPTION

RUNFLOOR F04 is a high-density plastic grid for creation of road surfaces with grass or gravel.




## 2. TECHNICAL SPECIFICATIONS

Material		LDPE 95-100% Additives 0-5%
Material Name	-	GRALENE LD BLACK
Percentage of recycled material	%	100
Colour	-	Black - Green
Dimensions	cm	58 x 58 x H4
Cells dimensions (tolerance $\pm 2\%$ )	cm	6,7 x 6,7
Weight	kg	1,67
Wall thickness	mm	4
UV stabilised	-	Yes
Load bearing capacity (filled grid)	t/m <sup>2</sup>	400
Traffic load rating*	t/axle	10
Permeability	%	89
Filling volume	m <sup>3</sup> /m <sup>2</sup>	0,037
Type of connection	-	interlocking
Place of production	-	Italy


\* according to DIN1072

### 3. TECHNICAL DRAWINGS

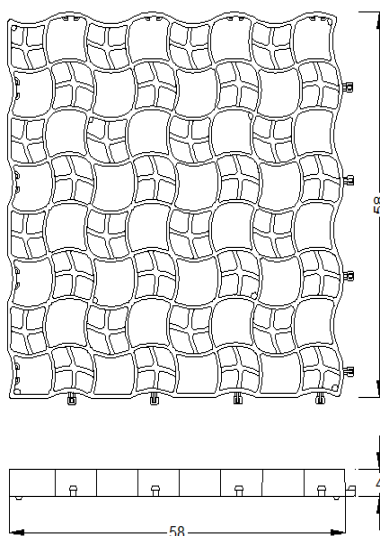

### 4. INSTALLATION

#### 4.1 Grass surfaces

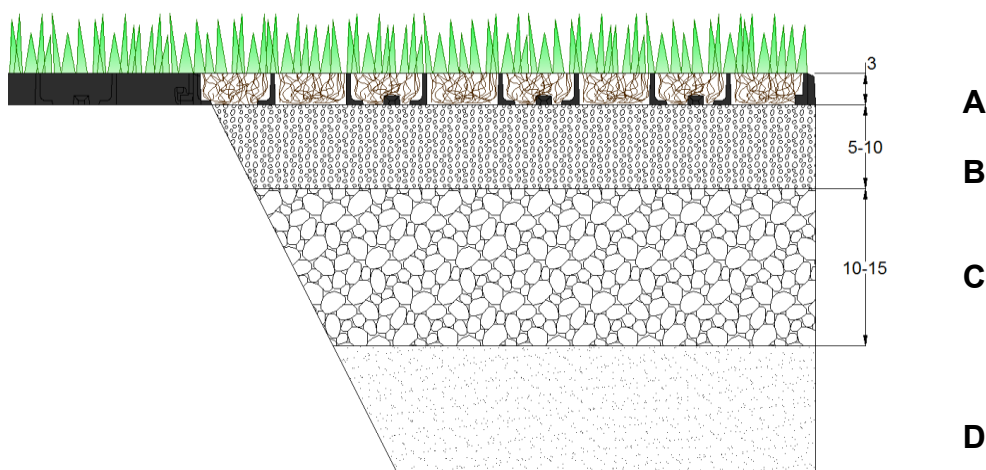


A- Runfloor F04; B- Bedding layer; C- Foundation; D- Natural soil

- 1) **Ground preparation** - Remove topsoil and dig to the depth required by the build-up of foundation and pavers.
- 2) **Foundation** - A permeable foundation is to be built, typically at least 150 mm of well compacted crushed stone placed over a geotextile separation membrane. The foundation must in any case be built so that it is capable of carrying the maximum bearing load likely to be applied and in the wettest of conditions; please refer to local norms and regulations as well as best practice for foundation construction. A preliminary geotechnical investigation may be required.
- 3) **Bedding** - Lay 50 mm of volcanic sand (grain size 0-5 mm) enriched with vegetation soil and organic fertilizer. Compact and level perfectly.
- 4) **RUNFLOOR F04 paver laying** - Install the RUNFLOOR F04 grids, pre-assembled in mats of 4 pieces each (1,35 m<sup>2</sup> per mat). Take care of leaving a gap of at least 30 mm between the grids and any fixed object (curbs, manholes, walls) to allow for thermal expansion. The pavers can be easily cut to shape to fit around obstructions. The walls of RUNFLOOR F04 are curved and designed to absorb thermal expansion. Expansion joints are not necessary even for large paved surfaces. Installation time around 80 m<sup>2</sup> per hour per man. The maximum recommended installation slope is 8%.

- 5) **RUNFLOOR F04 paver filling** - Fill the cells with a mixture of volcanic sand (grain size 0-5 mm) and vegetation soil and organic fertilizer OR a blend of siliceous sand and vegetation soil enriched with peat and humus. Alternative filling material is also possible as long as permeability and fertility are ensured. When cells are full spray water to make the soil settle, then top up the cells. Install car park markers before filling.
- 6) **Seeding** - Seed grass in the finished surface or for best results mix the seeds in with the cell fill soil. Choose grass types well suited to the climate and location. Water regularly until grass has grown. Do not drive over the surface until the grass has rooted developed sufficiently, typically not until it has been cut twice.
- 7) **Maintenance and usage recommendations** - Regularly fertilize the grass and, if in place, check that the irrigation system is working properly. Periodically check if cells need topping up, fill whenever necessary with vegetation soil. Avoid using the area paved with RUNFLOOR F04 for turning areas of heavy vehicles (HGVs and others).

## 4.2 Gravel surfaces

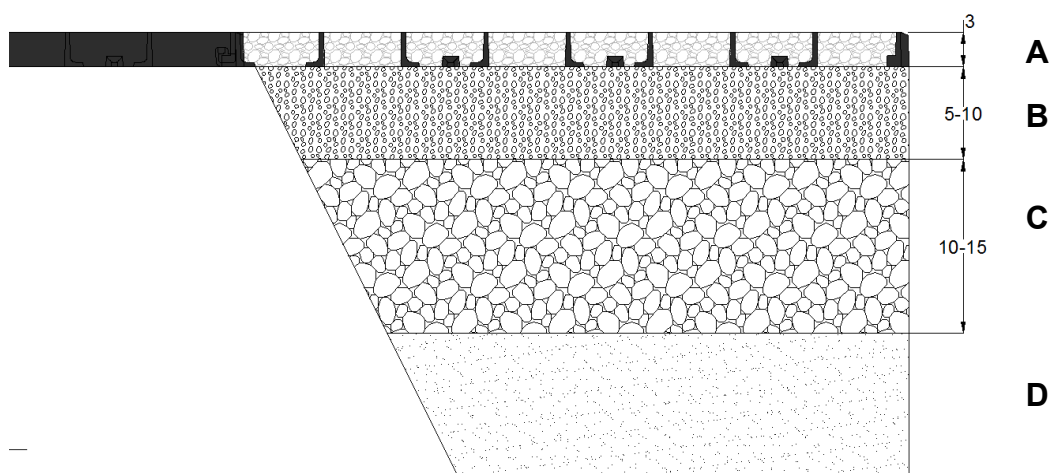

A- Runfloor F04; B- Bedding layer; C- Foundation; D- Natural soil

- 1) **Ground preparation** - Remove topsoil and dig to the depth required by the build-up of foundation and pavers.
- 2) **Foundation** - A permeable foundation is to be built, typically at least 150 mm of well-compacted crushed stone placed over a geotextile separation membrane. The foundation must in any case be built so that it is capable of carrying the maximum bearing load likely to be applied and in the wettest of conditions; please refer to local norms and regulations as well as best practice for foundation construction. A preliminary geotechnical investigation may be required.
- 3) **Bedding** - Lay 30-40 mm of fine gravel, well compacted and leveled.
- 4) **RUNFLOOR F04 paver laying** - Install the RUNFLOOR F04 grids, pre-assembled in mats of 4 pieces each (1,35 m<sup>2</sup> per mat). Take care of leaving a gap of at least 30 mm between the grids and any fixed object (curbs, manholes, walls) to allow for thermal expansion. The pavers can be easily cut to shape to fit around obstructions. The walls of RUNFLOOR F04 are curved and designed to absorb thermal expansion. Expansion joints are not necessary even for large paved surfaces. Installation time around 80 m<sup>2</sup> per hour per man. The maximum recommended installation slope is 8%.
- 5) **RUNFLOOR F04 paver filling** - Fill the cells with the chosen material, use preferably rough-edged stone for best stability. Compact the filling material and top up if necessary. Install car park markers before filling.
- 6) **Maintenance and usage recommendations** - Periodically check if cells need topping up. Avoid using the area paved with RUNFLOOR F04 for turning areas of heavy vehicles (HGVs and others).

## 5. PACKAGING AND TRANSPORT

Product code	-	FRUNFF45858 (black) FRUNFV45858 (green)
Pcs per sqm	pcs	3
Packaging	-	Pre-assembled sheets on pallet
Pcs per pallet	pcs	228
Surface per pallet	m <sup>2</sup>	76
Packaging dimensions	cm	120x120xH242

## 6. ACCESSORIES

### Car park marker for RUNFLOOR F04

The car park marker for RUNFLOOR F04 incorporates 4 hooks and solid anchors in the cells. It can only be removed after lifting the paver. The top face of the marker incorporates anti-skid grooves and dimples.

Product code	-	FRUNTAB0004 (white) FRUNTAG0004 (yellow)
Shape	-	Octagonal
Dimensions	cm	7,8 x 7,8
Total elevation (above the paver)	cm	1,1
Pcs for line making	pz/ml	4
Material	-	HD PE

